


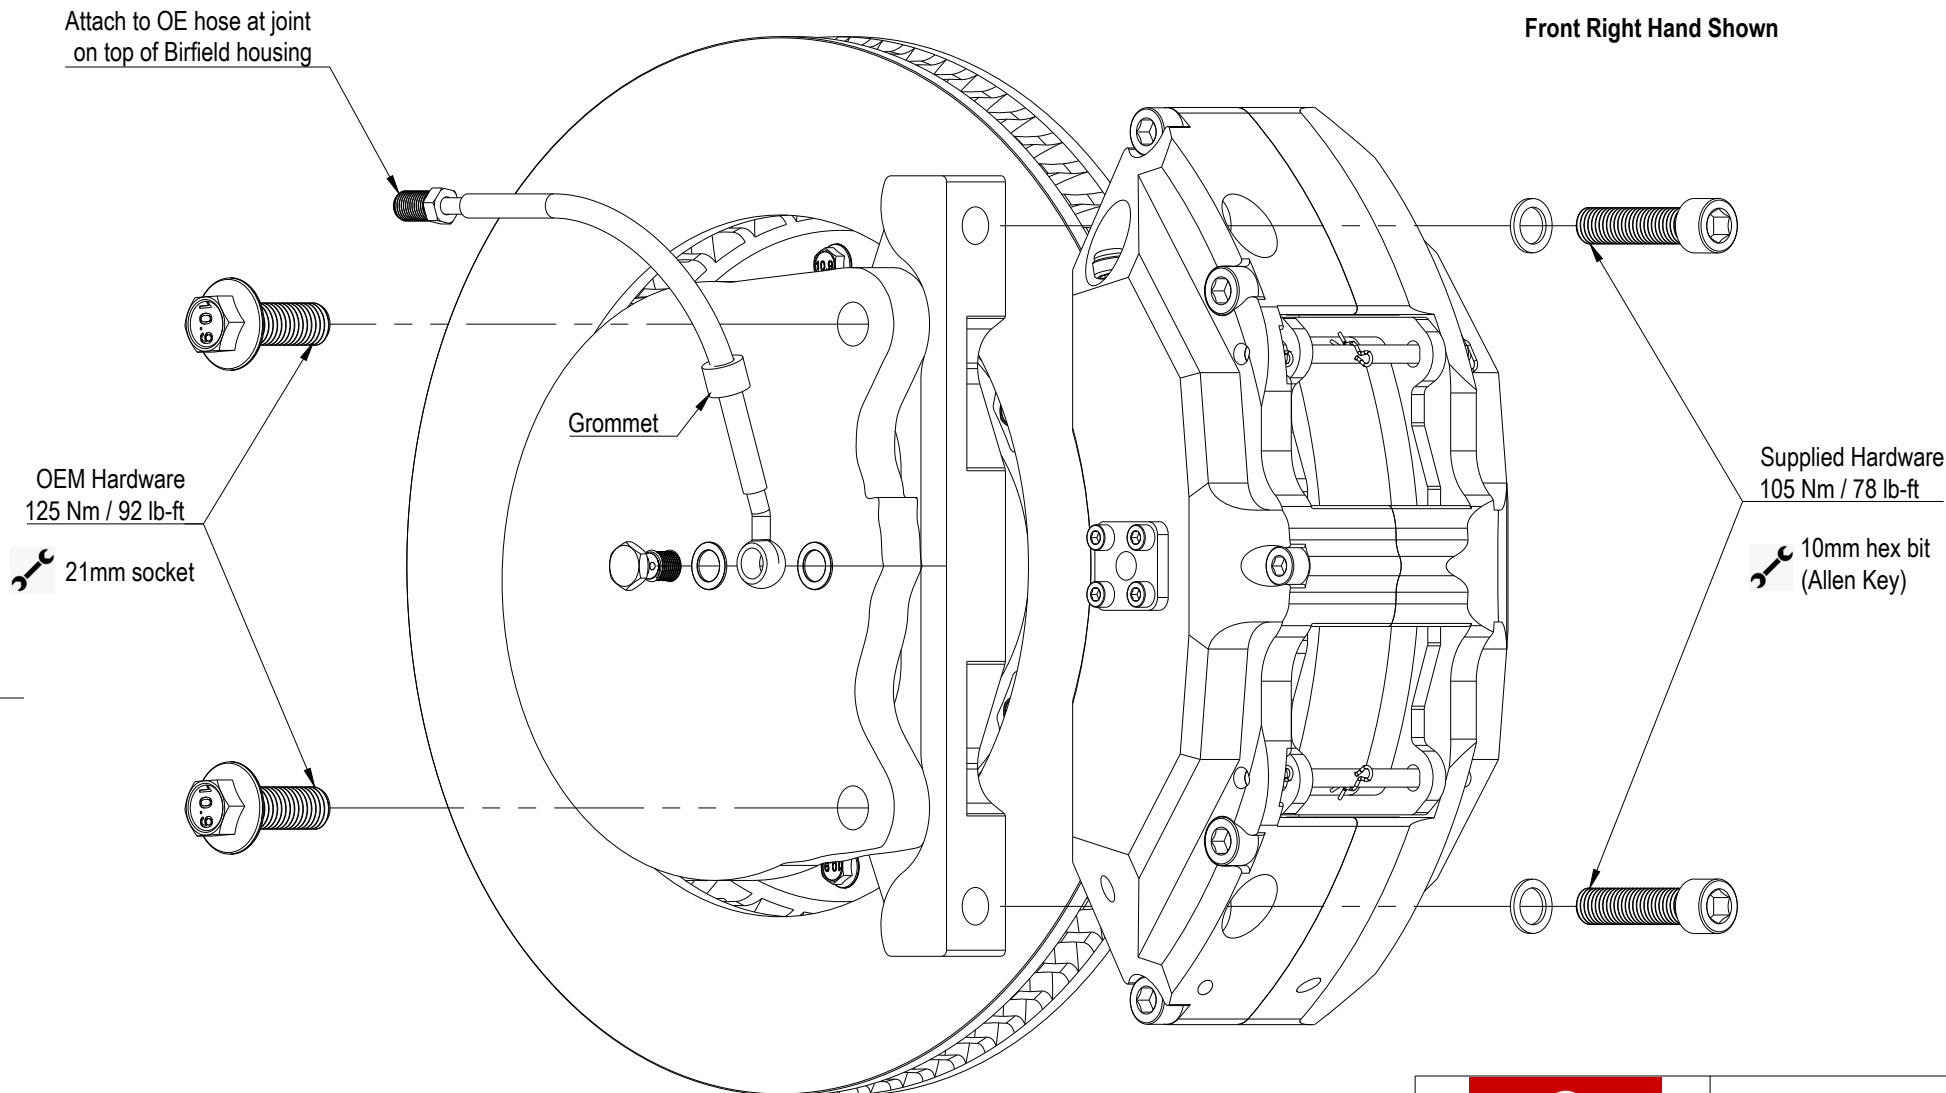

OE front brake pad wear sensor:

The OE brake pad wear sensor is not compatible with this kit. It is recommended to cut the wear sensor wiring between the brake pad and the first plastic connector. Leave the connector attached to the vehicle's wiring. Strip away a section of the outer sheath of the two cut wires coming from the connector and twist them together to ensure the brake pad wear lamp is not illuminated on the instrument cluster. Seal them with the supplied lead-center heatshrink. Re-attach the wear sensor wiring to the new brake hose using the OE wire clip on the available grommet.

POWERBRAKE

www.powerbrake.co.za
www.powerbrakeglobal.com

Assembly diagram for bracket orientation and torque specs

DATE: 2025/05/05

VEHICLE: Ineos Grenadier

KIT: X6M / 350x34mm 2-pc

PLATFORM CODE: INE01F

Observe required torque specifications using an appropriate torque wrench / Do not use thread lockers on caliper mounting bolts

Brake Pad Replacement Part Numbers	
Manufacturer	Part #
FMSI	D1116
Powerbrake PB01	5001-PB01
Powerbrake PB05	5001-PB05
Endless	RCP112xx
G-Loc	GP1365
Bendix Australia	DB1845U
Mintex	MDB3115
Mintex (Alternative)	MDB3116 (lower friction)
Ferodo (Street)	FDB4212 or FDS4212
Ferodo (Race)	FRP3100
Hawk Performance	HB616x.607
Hella Pagid (Street)	8DB 355 019-521
Pagid (Race)	8005
Febi Bilstein	116138
PFC	9195

xx Designates manufacturer's friction compound. Select appropriate compound for application.
Contact our Sales Office for more info if required.

Spare Part Numbers	
Description	Part #
Disc / Rotor Ring LH	ATM350X34L
Disc / Rotor Ring RH	ATM350X34R
Disc hardware assembly kit (1 kit per ring)	PB501-SF
Caliper Seal Kit *	CSK-xx/xx/xx-O

* xx/xx/xx refers to the piston sizes of your X-Line caliper - lasered onto the inboard face of caliper body